

2017 Automatic tuning horizontal dipole



The Barrett 2017 Automatic tuning horizontal dipole is designed for base station applications where space is at a premium but high performance is still required.

Mounting on a standard 50 mm pole the Barrett Automatic tuning horizontal dipole can be mounted as close as 6 metres from the ground making it extremely easy to install.

With a packed length of only 2.1 metres the antenna can be easily transported by air.

The integral receive preamp provides impedance matching during scan mode operation for reliable scanning and link establishment operation using modern radio protocols.

The tuner has a memory system that stores tuning information for each channel after an initial tune sequence.

Assembly fixtures are supplied to assist in mounting the antenna to an existing mast, tower or pole. Alternatively a range of suitable masts can be supplied with the antenna.

The Barrett 2017 is supplied standard with a 30 metre composite control, RF cable and connectors to interface with Barrett 2050 transceivers.



www.barrettcommunications.com.au

BCB2017/5

MADE IN AUSTRALIA



2017 Automatic tuning horizontal dipole


Features

- 3 MHz to 30 MHz frequency coverage
- Efficient – tuned on each frequency
- Simple installation in space restricted areas
- Broadband amplifier in receive mode
- Memory tuning – less than 10 mS

Specifications



Frequency range	3 MHz to 30 MHz
VSWR	1.5:1
Polarisation	Horizontal
Impedance	50 ohm
Power input	200 W PEP maximum
Width deployed	8 metres
Input impedance range	45 to 55 ohm
VSWR: (typical)	Typically less than 1.4:1
DC input requirements	+13.8 V DC (Derived from 2000 series transceiver via integral RF control cable)
DC operating range	+10 to 15 V DC
Input current average	0.9 Amps
Tuning time - first tune	Less than 2 seconds - typical
Tuning time - from memory	Less than 10 mS - typical
Memory addresses	170
Operating temperature	-35°C to +70°C
Antenna weight (total)	10 kg

Dimensions

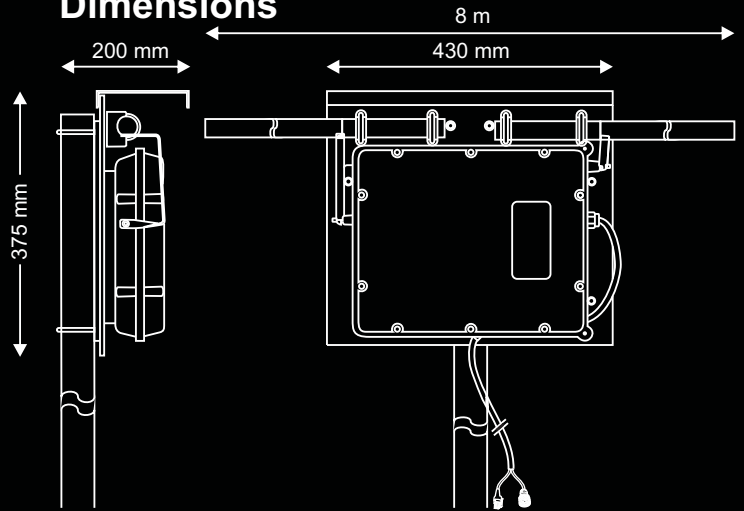

Radiation pattern

This antenna will operate acceptably down to heights of 6m. Improved gain is available as height approaches 10m, although radiation patterns will exhibit more lobes and nulls.

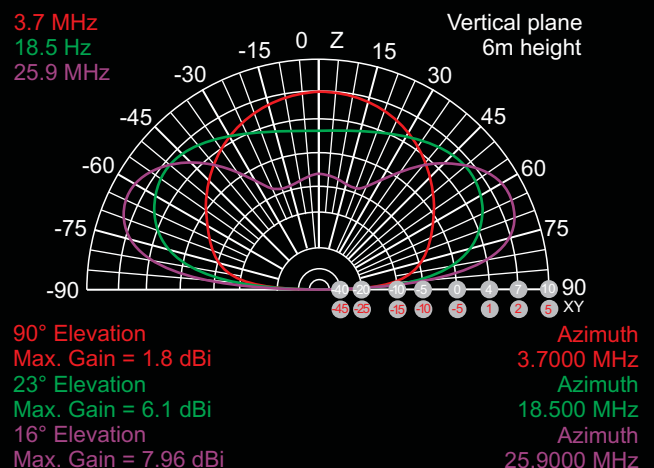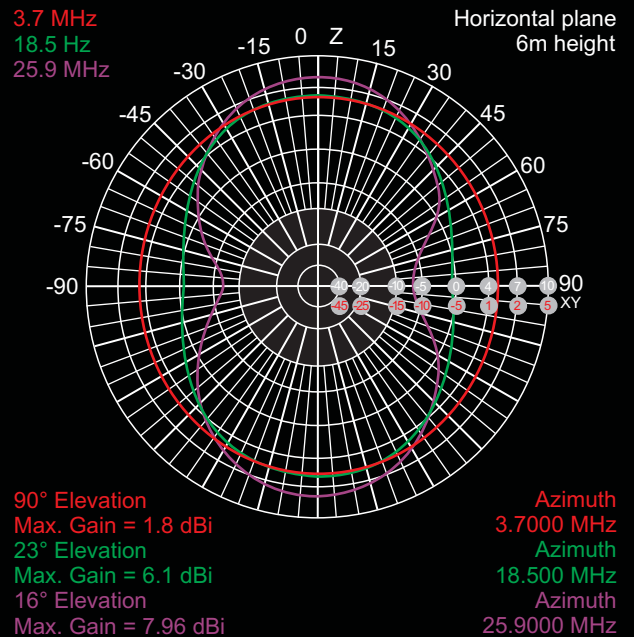

Head Office:
Barrett Communications Pty Ltd
47 Discovery Drive, Bibra Lake,
WA, 6163 AUSTRALIA
Toll Free Tel: 1800 999 580
Tel: +618 9434 1700
Fax: +618 9418 6757
email: information@barrettcommunications.com.au

European Office:
Barrett Europe Limited
Unit 9, Fulcrum 2, Solent Way,
Whiteley, Hampshire PO15 7FN
UNITED KINGDOM
Tel: +44 (0) 1489 880 332
Fax: +44 (0) 1489 565 422
email: uksales@barrettcommunications.com.au

Americas Office:
Barrett Communications USA LLC
1000 North West Street, Suite 1200
Wilmington, Delaware 19801-1058
UNITED STATES OF AMERICA
Tel: +1 703 291 0414
Fax: +1 703 291 4950
email: sales@barrettusa.com

