

2019 Automatic tuning mobile HF antenna



The Barrett 2019 is an automatic tuning mobile antenna, designed to interface with Barrett 2000 series transceivers.

Providing a frequency coverage of 2 MHz to 30 MHz, the Barrett 2019 features rapid tuning (typically <math><1.5\text{ S}</math>) and low power consumption. High radiation efficiency and accurate tuning are assured by maximising antenna current (not minimising the VSWR) on every tune. The Barrett 2019 antenna incorporates a wideband amplifier that is activated in receive mode to enable channel scanning. Due to its rugged RF design, the Barrett 2019 antenna can also be used with high duty cycle applications such as the Barrett 923 or 2020 fax and data system and is compatible with ALE operation.

An optional GPS receiver can be fitted within the 2019 antenna casing and interfaces directly through the RF control cable to current production 2050 transceivers.

The active tuning elements of the antenna are housed in black waterproof, highly impact resistant technical plastic moulding. The housing incorporates a heavy duty anti-vibration mount at its base. Even with its rugged construction, the Barrett 2019 weighs only 3.6 kg.

The Barrett 2019 is supplied standard with a two piece fibreglass MIL-STD whip and a tapered spring. An optional NVIS extension is available in the form of two extra whip sections. The main antenna body has a MIL-STD control cable connector and a UHF RF connector. The 2019 is supplied with a 6 metre composite control and RF cable and connectors to connect it with the transceiver. A 10 metre control RF cable is available as an accessory.



www.barrettcommunications.com.au

BCB2019/6


HF Radio Communications

2019 Automatic tuning mobile HF antenna



Specifications

Standards	Complies with MIL-STD 810G for drop, dust, temperature, shock and vibration
Frequency range	2 MHz to 30 MHz (continuous)
Power handling capability	150 W PEP
VSWR	Better than 2:1 when tuned
Tuning time	Less than 1.5 seconds (typical)
Operating temperature	-30°C to +60°C
Humidity	95% relative, non-condensing
Environmental	IP67 immersion 1 m for 1 hr
Supply voltage	12.6 V DC (derived from transceiver)
Antenna impedance	50 ohm unbalanced
Mounting	M16 stud with provision for padlock
Input current	Average 80 mA @ +12.6 V input
Shock	MIL-STD 810G Method 516.6
Vibration	MIL-STD 810G Method 514.6

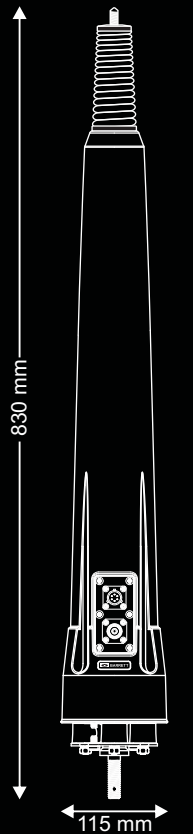

Main antenna body weight including heavy duty spring 4.15 kg



Standard 2 piece whip kit 0.55 kg



NVIS 2 piece extension whip kit 0.60 kg



Total antenna lengths with standard and NVIS whips



Head Office:
 Barrett Communications Pty Ltd
 47 Discovery Drive, Bibra Lake, WA, 6163 AUSTRALIA
 Toll Free Tel: 1800 999 580 Tel: +618 9434 1700 Fax: +618 9418 6757
 email: information@barrettcommunications.com.au

European Office:
 Barrett Europe Limited
 Unit 9, Fulcrum 2, Solent Way, Whiteley, Hampshire
 PO15 7FN UNITED KINGDOM
 Tel: +44 (0) 1489 880 332 Fax: +44 (0) 1489 565 422
 email: uksales@barrettcommunications.com.au

Americas Office:
 Barrett Communications USA LLC
 1000 North West Street, Suite 1200 Wilmington,
 Delaware 19801-1058
 UNITED STATES OF AMERICA
 Tel: +1 703 291 0414 Fax: +1 703 291 4950
 email: sales@barrettusa.com

